

National Information Assurance Partnership
Common Criteria Evaluation and Validation Scheme



Validation Report

for

Cisco Integrated Service Routers Generation 2

(ISR G2)

Report Number: CCEVS-VR-VID10542-2014
Dated: March 27, 2014
Version: 1.0

National Institute of Standards and Technology
Information Technology Laboratory
100 Bureau Drive
Gaithersburg, MD 20899

National Security Agency
Information Assurance Directorate
9800 Savage Road STE 6940
Fort George G. Meade, MD 20755-6940

Table of Contents

1	Executive Summary	1
2	Identification	7
2.1	Threats	7
2.2	Organizational Security Policies.....	8
3	Architectural Information	9
4	Assumptions.....	10
4.1	Clarification of Scope	10
5	Security Policy	12
5.1	Security Audit.....	12
5.2	Cryptographic Support.....	12
5.3	User Data Protection.....	12
5.4	Identification and Authentication	12
5.5	Security Management	13
5.6	Packet Filtering.....	13
5.7	Protection of the TSF.....	13
5.8	Resource Utilization	13
5.9	TOE Access	14
5.10	Trusted Path/Channels	14
6	Documentation.....	15
6.1	Product Guidance.....	15
7	Independent Testing.....	18
8	Evaluated Configuration	19
9	Results of the Evaluation	20
10	Validator Comments/Recommendations	21
11	Annexes	22
12	Security Target.....	23
13	Abbreviations and Acronyms	24
14	Bibliography	26

VALIDATION REPORT
Cisco ISR G2

List of Tables

Table 1: Router Models in the Evaluated Configuration	2
Table 2: Evaluation Details.....	5
Table 3: ST and TOE identification.....	7
Table 4: Supporting TOE Guidance Documentation.....	15
Table 5: TOE Security Assurance Requirements	20

VALIDATION REPORT
Cisco ISR G2

1 Executive Summary

This report is intended to assist the end-user of this product and any security certification agent for that end-user in determining the suitability of this Information Technology (IT) product in their environment. End-users should review the Security Target (ST), which is where specific security claims are made, in conjunction with this Validation Report (VR), which describes how those security claims were evaluated and tested and any restrictions on the evaluated configuration. Prospective users should read carefully the Assumptions and Clarification of Scope in Section 4 and the Validator Comments in Section 10, where any restrictions on the evaluated configuration are highlighted.

This report documents the National Information Assurance Partnership (NIAP) assessment of the evaluation of Cisco Integrated Service Routers Generation 2 (hereafter referenced as Cisco ISR G2). It presents the evaluation results, their justifications, and the conformance results. This VR is not an endorsement of the Target of Evaluation (TOE) by any agency of the U.S. Government and no warranty of the TOE is either expressed or implied. This VR applies only to the specific version and configuration of the product as evaluated and as documented in the ST.





The evaluation of Cisco ISR G2 was performed by Leidos (formerly Science Applications International Corporation (SAIC)) Common Criteria Testing Laboratory (CCTL) in Columbia, Maryland, United States of America and was completed in March 2014. The evaluation was conducted in accordance with the requirements of the Common Criteria and Common Methodology for IT Security Evaluation (CEM), version 3.1, revision 4 and assurance activities specified in Protection Profile for Network Devices, Version 1.1, 8 June 2012 and Network Device Protection Profile (NDPP) Extended Package VPN Gateway, Version 1.1, 12 April 2013. The evaluation was consistent with NIAP Common Criteria Evaluation and Validation Scheme (CCEVS) policies and practices as described on their web site (www.niap-ccevs.org).

The Leidos evaluation team determined that Cisco ISR G2 is conformant to the claimed Protection Profiles (PPs) and, when installed, configured and operated as specified in the evaluated guidance documentation, satisfies all of the security functional requirements stated in the ST. The information in this VR is largely derived from the Assurance Activities Report (AAR) and associated test report produced by the Leidos evaluation team.




The TOE is a hardware and software solution that consists of the Universal Cisco Inter-network Operating System (IOS) software image Release 15.2(4)M6 running on any of the router models listed in Table 1. The network on which they reside is considered part of the operational environment.

VALIDATION REPORT
Cisco ISR G2




Table 1: Router Models in the Evaluated Configuration

Hardware	Picture	Interoperability	Size	Power	Interfaces
Cisco 1905 ISR G2		N/A	1.75 x 13.5 x 11.5 in.	100 to 240 VAC (Volts Alternating Current)	(1) slot for operational environment provided Ethernet High-Speed Wide Area Network (WAN) Interface Cards (EHWICs) (2) Integrated 10/100/1000 Gigabit Ethernet WAN Ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port
Cisco 1921 ISR G2		N/A	1.75 x 13.5 x 11.5 in.	100 to 240 VAC	(2) slots for operational environment provided EHWICs (2) Integrated WAN Ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (2) 10/100/1000 Ethernet Ports
Cisco 1941 ISR G2		N/A	3.5 in x 13.5 in x 11.5 in	100 to 240 VAC	(2) slots for operational environment provided EHWICs (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (2) 10/100/1000 Ethernet Ports
Cisco 2901 ISR G2		N/A	1.75 x 17.25 x 17.3 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (2) 10/100/1000 Ethernet Ports



VALIDATION REPORT
Cisco ISR G2

Hardware	Picture	Interoperability	Size	Power	Interfaces
Cisco 2911 ISR G2		N/A	3.5 x 17.25 x 12 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (1) Service module port (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (3) 10/100/1000 Ethernet Ports
Cisco 2921 ISR G2		N/A	3.5 x 17.25 x 18.5 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (1) SFP-based ports (2) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (3) 10/100/1000 Ethernet Ports
Cisco 2951 ISR G2		N/A	3.5 x 17.25 x 18.5 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (1) SFP-based ports (2) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (3) 10/100/1000 Ethernet Ports

VALIDATION REPORT
Cisco ISR G2

Hardware	Picture	Interoperability	Size	Power	Interfaces
Cisco 3925 ISR G2		N/A	5.25 x 17.25 x 18.75 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (2) SFP-based ports (2) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (3) 10/100/1000 Ethernet Ports
Cisco 3925E ISR G2		N/A	5.25 x 17.25 x 18.75 in.	100 to 240 VAC auto ranging	(3) slots for operational environment provided EHWICs (2) SFP-based ports (2) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (4) GigE Ports (4) 10/100/1000 Ethernet Ports
Cisco 3945 ISR G2		N/A	5.25 x 17.25 x 18.75 in.	100 to 240 VAC auto ranging	(4) slots for operational environment provided EHWICs (2) SFP-based ports (4) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (3) 10/100/1000 Ethernet Ports

VALIDATION REPORT
Cisco ISR G2

Hardware	Picture	Interoperability	Size	Power	Interfaces
Cisco 3945E ISR G2		N/A	5.25 x 17.25 x 18.75 in.	100 to 240 VAC auto ranging	(3) slots for operational environment provided EHWICs (2) SFP-based ports (4) Service module ports (1) USB Console Port (1) Serial Console Port (1) Auxiliary Port (4) GigE Ports (4) 10/100/1000 Ethernet Ports
ISM-VPN-19		1941	0.85 x 4 x 6.1 in.	20W	N/A
ISM-VPN-29		2901, 2911, 2921, 2951			
ISM-VPN-39		3925, 3945			

The validation team monitored the activities of the evaluation team, examined evaluation evidence, provided guidance on technical issues and evaluation processes, and reviewed the evaluation results produced by the evaluation team. The validation team found that the evaluation results showed that all assurance activities specified in the claimed PPs had been completed successfully and that the product satisfies all of the security functional and assurance requirements stated in the ST. Therefore the validation team concludes that the testing laboratory's findings are accurate, the conclusions justified, and the conformance results are correct. The conclusions of the testing laboratory in the evaluation technical report are consistent with the evidence produced.

Table 2: Evaluation Details

Item	Identifier
Evaluated Product	Cisco Integrated Service Routers Generation 2 (ISR G2)
Sponsor & Developer	Cisco Systems, Inc. 170 West Tasman Drive San Jose, CA 95134
CCTL	Leidos Common Criteria Testing Laboratory 6841 Benjamin Franklin Drive Columbia, MD 21046
Completion Date	27 March 2014
CC	Common Criteria for Information Technology Security Evaluation, Version 3.1, Revision 4, September 2012
Interpretations	There were no applicable interpretations used for this evaluation.

VALIDATION REPORT
Cisco ISR G2

Item	Identifier
CEM	Common Methodology for Information Technology Security Evaluation: Version 3.1, Revision 4, September 2012
Protection Profile	<i>Protection Profile for Network Devices</i> , Version 1.1, 8 June 2012 <i>Network Device Protection Profile (NDPP) Extended Package VPN Gateway</i> , Version 1.1, 12 April 2013 Note: no published errata were applied to either the PP or the EP
Evaluation Class	None
Disclaimer	The information contained in this Validation Report is not an endorsement of the Cisco ISR G2 by any agency of the U.S. Government and no warranty of Cisco ISR G2 is either expressed or implied.
Evaluation Personnel	Kevin Micciche Christopher Keenan Tony Apted
Validation Personnel	Daniel Faigin, The Aerospace Corporation Jerome Myers, The Aerospace Corporation

2 Identification

The CCEVS is a joint National Security Agency (NSA) and National Institute of Standards and Technology (NIST) effort to establish commercial facilities to perform trusted product evaluations. Under this program, security evaluations are conducted by commercial testing laboratories called Common Criteria Testing Laboratories (CCTLs) in accordance with National Voluntary Laboratory Assessment Program (NVLAP) accreditation.

The NIAP Validation Body assigns Validators to monitor the CCTLs to ensure quality and consistency across evaluations. Developers of information technology products desiring a security evaluation contract with a CCTL and pay a fee for their product's evaluation. Upon successful completion of the evaluation, the product is added to NIAP's Product Compliant List (PCL).

The following table identifies the evaluated Security Target and TOE.

Table 3: ST and TOE identification

Name	Description
ST Title	Cisco Integrated Service Routers Generation 2 (ISR G2) Security Target
ST Version	1.1
Publication Date	March 2014
Vendor and ST Author	Cisco Systems, Inc.
TOE Reference	Cisco Integrated Service Routers Generation 2 (ISR G2)
TOE Hardware Models	Refer to devices in Table 1
TOE Software Version	Internetwork Operating System (IOS) 15.2(4)M6

2.1 Threats

The ST identifies the following threats that the TOE and its operational environment are intended to counter:

- An administrator may unintentionally install or configure the TOE incorrectly, resulting in ineffective security mechanisms.
- Security mechanisms of the TOE may fail, leading to a compromise of the TSF.
- A user may gain unauthorized access to the TOE data and TOE executable code. A malicious user, process, or external IT entity may masquerade as an authorized entity in order to gain unauthorized access to data or TOE resources. A malicious user, process, or external IT entity may misrepresent itself as the TOE to obtain identification and authentication data.
- A malicious party attempts to supply the end user with an update to the product that may compromise the security features of the TOE.
- Malicious remote users or external IT entities may take actions that adversely affect the security of the TOE. These actions may remain undetected and thus their effects cannot be effectively mitigated.
- User data may be inadvertently sent to a destination not intended by the original sender.

VALIDATION REPORT
Cisco ISR G2

- Sensitive information on a protected network might be disclosed resulting from ingress- or egress-based actions
- Unauthorized access may be achieved to services on a protected network from outside that network, or alternately services outside a protected network from inside the protected network
- Access to services made available by a protected network might be used counter to Operational Environment policies
- Security mechanisms of the TOE may fail, leading to a compromise of the TSF
- If malicious or external IT entities are able to gain access to the network, they may have the ability to capture information traversing throughout the network and send them on to the intended receiver
- A malicious party attempts to change the data being sent – resulting in loss of integrity
- While a VPN client may have the necessary credentials (e.g., certificate, pre-shared key) to connect to a VPN gateway, there may be instances where the remote client, or the machine the client is operating on, has been compromised and attempts to make unauthorized connections
- There may be an instance where a remote client's session is hijacked due to session activity. This could be accomplished because a user has walked away from the machine that was used to establish the session
- A remote machine's network traffic may be exposed to a hostile network. A user may be required to use a hostile (or unknown) network to send network traffic without being able to route the traffic appropriately

2.2 Organizational Security Policies

The ST identifies the following organizational security policy that the TOE and its operational environment are intended to fulfill:

- The TOE shall display an initial banner describing restrictions of use, legal agreements, or any other appropriate information to which users consent by accessing the TOE.

3 Architectural Information

The TOE is a hardware and software solution that consists of the Universal Cisco Inter-network Operating System (IOS) software image Release 15.2(4)M6 running on any of the router models listed in Table 1. Each device included in the scope of the evaluation has two or more network interfaces and is connected to at least one internal and one external network. The TOE's configuration determines the handling of traffic flows received on an interface. Typically, packet flows are passed through the internetworking device and forwarded to their configured destination.

The TOE can optionally connect to a Network Time Protocol (NTP) server on its internal network for time services. When the TOE is remotely administered, Secure Shell v2 (SSHv2) must be used to connect to the TOE. A syslog server can also be used to store audit records. A remote authentication server can also be used for centralized authentication. If these servers are used, they must be attached to the internal (trusted) network. The internal (trusted) network is meant to be separated effectively from unauthorized individuals and user traffic; one that is in a controlled environment where implementation of security policies can be enforced.

Figure 1 depicts an example TOE deployment.

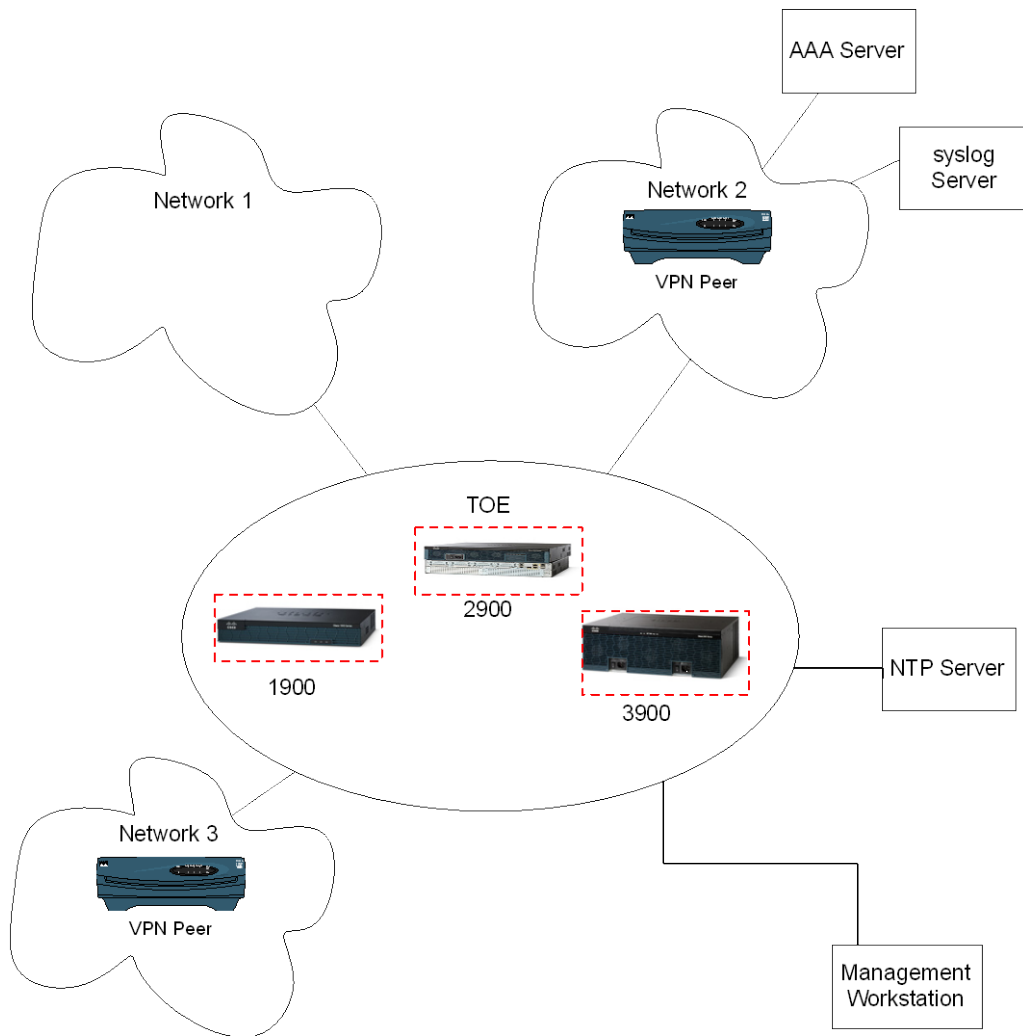


Figure 1: TOE Deployment Example

4 Assumptions

The ST identifies the following assumptions about the use of the product:

- It is assumed that there are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE.
- Physical security, commensurate with the value of the TOE and the data it contains, is assumed to be provided by the environment.
- TOE Administrators are trusted to follow and apply all administrator guidance in a trusted manner.
- It is assumed that the TOE is connected to distinct networks in a manner that ensures that the TOE security policies will be enforced on all applicable network traffic flowing among the attached networks.

4.1 Clarification of Scope

All evaluations (and all products) have limitations, as well as potential misconceptions that need clarifying. This text covers some of the more important limitations and clarifications of this evaluation. Note that:

1. As with any evaluation, this evaluation only shows that the evaluated configuration meets the security claims made, with a certain level of assurance (the assurance activities specified in the claimed PPs and performed by the evaluation team).
2. This evaluation covers only the specific device models and software version identified in this document, and not any earlier or later versions released or in process.
3. The evaluation of security functionality of the product was limited to the functionality specified in the claimed PPs. Any additional security related functional capabilities of the product were not covered by this evaluation.
4. This evaluation did not specifically search for, nor attempt to exploit, vulnerabilities that were not “obvious” or vulnerabilities to objectives not claimed in the ST. The CEM defines an “obvious” vulnerability as one that is easily exploited with a minimum of understanding of the TOE, technical sophistication and resources.
5. The following specific product capabilities are excluded from use in the evaluated configuration:
 - a. Non-FIPS 140-2 mode of operation—this mode of operation allows cryptographic operations that are not FIPS-approved
 - b. Telnet—this service must be disabled in the evaluated configuration
 - c. SNMP—this service must be disabled in the evaluated configuration
 - d. HTTP—this service must be disabled in the evaluated configuration
6. The TOE, when configured in its evaluated configuration, supports (in some cases optionally) the following hardware, software, and firmware in its operational environment:
 - a. RADIUS or TACACS+ AAA Server (optional)—can be used to provide external authentication services to the TOE

VALIDATION REPORT
Cisco ISR G2

- b. Management workstation with SSHv2 client—used by a TOE administrator to connect to the TOE for the purpose of remote administration
- c. Local console—directly connected to the TOE via the Serial Console Port and used by the TOE administrator for the purpose of local administration
- d. Certification Authority (optional)—can be used to provide the TOE with a valid certificate during certificate enrollment
- e. Audit (syslog) server—an external audit server to which the TOE sends audit records (in the form of syslog messages)
- f. Remote VPN endpoint—this includes any VPN peer or client with which the TOE participates in VPN communications. Remote VPN Endpoints may be any device or software client that supports IPsec or SSL (TLS) VPN communications. Both VPN clients and VPN gateways are considered to be Remote VPN Endpoints by the TOE
- g. NTP server (optional)—the TOE supports communications with an NTP server in order to synchronize the date and time on the TOE with the NTP server's date and time
- h. USB token (optional)—the TOE supports the optional storing of digital certificates and private keys on a USB token.

5 Security Policy

The TOE enforces the following security policies as described in the ST.

Note: Much of the description of the security policy has been derived from the ST and the Final ETR.

5.1 Security Audit

The Cisco ISR G2 routers provide extensive auditing capabilities. The TOE can audit events related to cryptographic functionality, information flow control enforcement, identification and authentication, and administrative actions. The Cisco ISR G2 routers generate an audit record for each auditable event. The administrator configures auditable events, performs back-up operations and manages audit data storage. The TOE provides the audit trail protection by providing remote backup to a syslog server over an encrypted channel.

5.2 Cryptographic Support

The TOE provides cryptography in support of other Cisco ISR G2 security functionality. The cryptographic algorithms implemented in support of this functionality have been NIST-validated and the relevant Cryptographic Algorithm Validation Program (CAVP) certificate numbers are listed in Table 7 of the ST. The TOE provides cryptography in support of VPN connections and remote administrative management via SSHv2. The TOE can act as a certification authority, signing and issuing certificates to the TOE and other devices. The TOE can also use X.509v3 certificates for securing IPsec, SSH, and TLS sessions.

5.3 User Data Protection

The TOE ensures that packets transmitted from the TOE do not contain residual information from previous packets. Packets that are not the required length use zeroes for padding so that residual data from previous traffic is never transmitted from the TOE.

5.4 Identification and Authentication

The TOE performs two types of authentication: device-level authentication of the remote device (VPN peers) and user authentication for the authorized administrator of the TOE. Device-level authentication allows the TOE to establish a secure channel with a trusted peer. The secure channel is established only after each device authenticates the other. Device-level authentication is performed via IKE/IPsec mutual authentication. The IKE phase authentication for the IPsec communication channel between the TOE and authentication server and between the TOE and syslog server is considered part of the Identification and Authentication security functionality of the TOE.

The TOE provides authentication services for administrative users wishing to connect to the TOEs secure CLI administrator interface. The TOE requires authorized administrators to authenticate prior to being granted access to any of the management functionality. The TOE can be configured to require a minimum password length of 15 characters as well as mandatory password complexity rules as defined in the claimed PPs. The TOE provides administrator authentication against a local user database. Password-based authentication can be performed on the serial console or SSH interfaces. The SSHv2 interface also supports authentication using SSH keys. The TOE optionally supports use of a RADIUS or TACACS+ AAA server (part of the IT Environment) to facilitate authentication (including remote authentication, or password-based authentication) of administrative users attempting to connect to the TOE's CLI.

VALIDATION REPORT Cisco ISR G2

The TOE provides an automatic lockout when a user attempts to authenticate and enters invalid information. After a defined number of authentication attempts fail exceeding the configured allowable attempts, the user is locked out until an authorized administrator can enable the user account.

The TOE uses X.509v3 certificates as defined by RFC 5280 to support authentication for IPsec, TLS, and SSH connections.

5.5 Security Management

The TOE provides secure administrative services for management of general TOE configuration and the security functionality provided by the TOE. All TOE administration occurs through either a secure SSHv2 session or a local console connection. The TOE provides the ability to securely manage all TOE administrative users; all identification and authentication; all audit functionality of the TOE; all TOE cryptographic functionality; the timestamps maintained by the TOE; and TOE configuration file storage and retrieval. Administrators can create configurable login banners to be displayed at time of login, and can also define an inactivity timeout for each admin interface to terminate sessions after a set period of inactivity.

5.6 Packet Filtering

The TOE provides packet filtering and secure IPsec tunneling. The tunnels can be established between two trusted VPN peers as well as between remote VPN clients and the TOE. More accurately, these tunnels are sets of security associations (SAs). The SAs define the protocols and algorithms to be applied to sensitive packets and specify the keying material to be used. SAs are unidirectional and are established per the ESP security protocol. An authorized administrator can define the traffic that needs to be protected via IPsec by configuring access lists (permit, deny, log) and applying these access lists to interfaces using crypto map sets.

5.7 Protection of the TSF

The TOE protects against interference and tampering by untrusted subjects by implementing identification, authentication, and access controls to limit configuration to authorized administrators.

The TOE internally maintains the date and time. This date and time is used as the timestamp that is applied to audit records generated by the TOE. Administrators can update the TOE's clock manually, or can configure the TOE to use NTP to synchronize the TOE's clock with an external time source. Finally, the TOE performs testing to verify correct operation of the router itself and that of the cryptographic module.

The TOE can terminate inactive sessions after an authorized administrator configurable time-period. Once a session has been terminated, the TOE requires the user to re-authenticate to establish a new session. The TOE can also display an authorized administrator specified banner on the CLI management interface prior to allowing any administrative access to the TOE.

5.8 Resource Utilization

The TOE provides the capability of controlling and managing resources so that a denial of service will not occur. The resource allocations are configured to limit the number of concurrent administrator sessions.

VALIDATION REPORT
Cisco ISR G2

5.9 TOE Access

The TOE can terminate inactive sessions after an authorized administrator configurable time- period. Once a session has been terminated, the TOE requires the user to re-authenticate to establish a new session.

The TOE also provides the administrator with the ability to display a notification of use banner on the CLI management interface prior to allowing any administrative access to the TOE.

5.10 Trusted Path/Channels

The TOE establishes a trusted path between the appliance and the CLI, syslog server, NTP server and if configured, an external authentication server using IPsec.

6 Documentation

6.1 Product Guidance

Cisco offers a number of guidance documents along with a CC-specific supplemental document describing the installation process for the TOE as well as guidance for subsequent use and administration of the applicable security features.

The guidance documentation examined during the course of the evaluation and delivered with the TOE is as follows:

- Cisco Integrated Service Routers Generation 2 Common Criteria Operational User Guidance and Preparative Procedures, Version 1.1, EDCS-1196805, March 2014

This document in turn references the following documents that provide additional detailed guidance for specific TOE capabilities. Note that the evaluation examined these referenced documents only to the extent necessary to complete the assurance activities specified in the claimed PPs.

Table 4: Supporting TOE Guidance Documentation

Title	Date	Link
Loading and Managing System Images Configuration Guide, Cisco IOS Release 15 M&T	3/28/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/sys-image-mgmt/configuration/15-mt/sysimgmgmt-15-mt-book.html
Cisco 2900 and 3900 Series Hardware Installation Guide, OL-18712-01	11/4/2013	http://www.cisco.com/en/US/docs/routers/access/2900/hardware/installation/guide/Hardware_Installation_Guide.html
Configuration Fundamentals Configuration Guide, Cisco IOS Release 15.2(4)M6	3/31/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/fundamentals/configuration/15mt/fundamentals-15-mt-book.html
Security Configuration Guide: Zone-Based Policy Firewall, Cisco IOS Release 15M&T	3/29/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/sec_data_zbf/configuration/15-mt/sec-zone-pol-fw.html
Cisco 1900 Series Integrated Services Router Hardware Installation Guide, OL-19084-03	10/21/2011	http://www.cisco.com/en/US/docs/routers/access/1900/hardware/installation/guide/1900_HIG.html
Cisco IOS 15.2M&T Configuration Guides	2014	http://www.cisco.com/en/US/products/ps11746/products_installation_and_configuration_guides_list.html
Securing User Services Configuration Guide Library, Cisco IOS Release 15M&T	11/26/2012	http://www.cisco.com/en/US/docs/ios-xml/ios/security/config_library/15-mt/secuser-15-mt-library.html

VALIDATION REPORT
Cisco ISR G2

Title	Date	Link
Cisco 3900 Series, 2900 Series, and 1900 Series Integrated Services Routers Generation 2 Software Configuration Guide, OL-21850-01	6/27/2013	http://www.cisco.com/en/US/docs/routers/access/1900/software/configuration/guide/Software_Configuration.html
SSL VPN Configuration Guide, Cisco IOS Release 15M&T	12/20/2012	http://www.cisco.com/en/US/docs/ios-xml/ios/sec_conn_sslvpn/configuration/15-mt/sec-conn-sslvpn-15-mt-book.html
Cisco IOS Security Command Reference 15.2(4)M6	1/29/2014	Commands A to C: http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/security/a1/sec-a1-cr-book.html Commands D to L: http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/security/d1/sec-d1-cr-book.html Commands M to R: http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/security/m1/sec-m1-cr-book.html Commands S to Z: http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/security/s1/sec-s1-cr-book.html
Cisco IOS IP Routing: BGP Command Reference 15.2M&T	3/31/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/iproute_bgp/command/irg-cr-book.html
Cisco IOS IP Routing: ISIS Command Reference 15.2M&T	2/10/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/iproute_isis/command/irs-cr-book.html
Cisco IOS IP Routing: OSPF Command Reference 15.2M&T	4/9/2014	http://www.cisco.com/en/US/docs/ios-xml/ios/iproute_ospf/command/iro-cr-book.html
Cisco IOS IP Routing: RIP Command Reference 15.2M&T	8/13/2012	http://www.cisco.com/en/US/docs/ios-xml/ios/iproute_rip/command/irr-cr-book.html
Network Management Configuration Guide Library, Basic System Management Configuration Guide, Cisco IOS Release 15M&T	4/3/2013	http://www.cisco.com/en/US/docs/ios-xml/ios/bsm/configuration/15-mt/bsm-15-mt-book.html
FIPS 140-2 Non-Proprietary Security Policy for the Cisco Cisco ISR G2		See NIST listing.

VALIDATION REPORT
Cisco ISR G2

Title	Date	Link
Cisco IOS Configuration Fundamentals Command Reference	8/24/2012	http://www.cisco.com/en/US/docs/ios-xml/ios/fundamentals/command/Cisco_IOS_Configuration_Fundamentals_Command_Reference.html
Configuring Internet Key Exchange Version 2 (IKEv2)	5/19/2011	http://www.cisco.com/en/US/docs/ios-xml/ios/sec_conn_ikevpn/configuration/15-1mt/Configuring_Internet_Key_Exchange_Version_2.html
Configuring Certificate Enrollment for a PKI	3/31/2011	http://www.cisco.com/c/en/us/td/docs/ios/sec_secure_connectivity/configuration/guide/15_0/sec_secure_connectivity_15_0_book/sec_cert_enroll_pki.pdf
Public Key Infrastructure Configuration Guide, Cisco IOS Release 15MT	12/7/2013	http://www.cisco.com/en/US/docs/ios-xml/ios/sec_conn_pki/configuration/15-mt/sec-pki-15-mt-book.html

The above documents are considered to be part of the evaluated TOE. Any additional customer documentation delivered with the TOE or made available through electronic downloads should not be relied upon for using the TOE in its evaluated configuration.

The security target used is:

- Cisco Integrated Service Routers Generation 2 (ISR G2) Security Target, Version 1.1, March 2014

7 Independent Testing

This section describes the testing efforts of the evaluation team. It is derived from information contained in the following:

- Cisco Integrated Service Routers Generation 2 (ISR G2) Common Criteria Test Report and Procedures, Version 0.2, 31 March 2014.

The purpose of this activity was to confirm the TOE behaves in accordance with the TOE security functional requirements as specified in the ST for a product claiming conformance to NDPPv1.1 and VPNEPv1.1.

The evaluation team devised a Test Plan based on the Testing Assurance Activities specified in NDPPv1.1 and VPNEPv1.1. The Test Plan described how each test activity was to be instantiated within the TOE test environment. The evaluation team executed the tests specified in the Test Plan and documented the results in the team test report listed above.

Independent testing took place at the CCTL location in Columbia, Maryland in November 2013 and again in February 2014.

The evaluators received the TOE in the form that normal customers would receive it, installed and configured the TOE (in three distinct but representative configurations) in accordance with the provided guidance, and exercised the Team Test Plan on equipment configured in the testing laboratory.

Given the complete set of test results from the test procedures exercised by the evaluators, the testing requirements for NDPPv1.1 and VPNEPv1.1 are fulfilled.

8 Evaluated Configuration

The evaluated version of the TOE is Cisco ISR G2, comprising the hardware models identified in Table 1 and the software version identified in Table 3, as installed and configured according to the Cisco Integrated Service Routers Generation 2 Common Criteria Operational User Guidance and Preparative Procedures as well as the supporting guidance documentation identified in Table 4.

9 Results of the Evaluation

The evaluation was conducted based upon the assurance activities specified in Protection Profile for Network Devices, Version 1.1, 8 June 2012 and in Network Device Protection Profile (NDPP) Extended Package VPN Gateway, Version 1.1, 12 April 2013, in conjunction with version 3.1, revision 4 of the CC and the CEM. A verdict for an assurance component is determined by the resulting verdicts assigned to the corresponding evaluator action elements.

The validation team's assessment of the evidence provided by the evaluation team is that it demonstrates that the evaluation team performed the assurance activities in the claimed PPs, and correctly verified that the product meets the claims in the ST.

The details of the evaluation are recorded in the Evaluation Technical Report (ETR), which is controlled by the Leidos CCTL. The security assurance requirements are listed in the following table.

Table 5: TOE Security Assurance Requirements

Assurance Component ID	Assurance Component Name
ADV_FSP.1	Basic functional specification
AGD_OPE.1	Operational user guidance
AGD_PRE.1	Preparative procedures
ALC_CMC.1	Labeling of the TOE
ALC_CMS.1	TOE CM coverage
ATE_IND.1	Independent testing - conformance
AVA_VAN.1	Vulnerability survey

10 Validator Comments/Recommendations

The validators did not have any specific additional comments or recommendations.

11 Annexes

Not applicable.

12 Security Target

Cisco Integrated Services Router Generation 2 (ISR G2) Security Target, Version 1.1, March 2014

13 Abbreviations and Acronyms

AAA	Authentication, Authorization and Accounting
AAR	Assurance Activities Report
CAVP	Cryptographic Algorithm Validation Program
CC	Common Criteria
CCEVS	Common Criteria Evaluation and Validation Scheme
CCTL	CC Testing Laboratory
CEM	Common Methodology for IT Security Evaluation
CLI	Command Line Interface
EHWIC	Ethernet High-Speed WAN Interface Card
EP	Extended Package
ESP	Encapsulating Security Payload
ETR	Evaluation Technical Report
FIPS	Federal Information Processing Standard
GigE	Gigabit Ethernet
HTTP	Hypertext Transfer Protocol
IKE	Internet Key Exchange
IOS	Inter-network Operating System
IPsec	Internet Protocol security
ISR	Integrated Service Router
IT	Information Technology
NDPP	Network Device Protection Profile
NIAP	National Information Assurance Partnership
NIST	National Institute of Standards and Technology
NSA	National Security Agency
NTP	Network Time Protocol
NVLAP	National Voluntary Laboratory Assessment Program
OS	Operating System
PCL	Product Compliant List
PP	Protection Profile
RADIUS	Remote Authentication Dial In User Service
RFC	Request For Comment
SA	Security Association
SAR	Security Assurance Requirement
SFP	Small Form-factor Pluggable
SFR	Security Functional Requirement
SNMP	Simple Network Management Protocol
SSHv2	Secure Shell version 2
SSL	Secure Sockets Layer
ST	Security Target
TACACS+	Terminal Access Controller Access-Control System Plus
TLS	Transport Layer Security
TOE	Target of Evaluation
TSF	TOE Security Functions
TSS	TOE Summary Specification
USB	Universal Serial Bus
VAC	Volts Alternating Current

VALIDATION REPORT
Cisco ISR G2

VPN Virtual Private Network
VR Validation Report
WAN Wide Area Network

14 Bibliography

The Validation Team used the following documents to produce this Validation Report:

- [1] Common Criteria for Information Technology Security Evaluation Part 1: Introduction, Version 3.1, Revision 3, July 2009.
- [2] Common Criteria for Information Technology Security Evaluation Part 2: Security Functional Requirements, Version 3.1 Revision 3, July 2009.
- [3] Common Criteria for Information Technology Security Evaluation Part 3: Security assurance components, Version 3.1 Revision 3, July 2009.
- [4] Common Methodology for Information Technology Security Evaluation, Evaluation Methodology, Version 3.1, Revision 3, July 2009.
- [5] Cisco Integrated Service Routers Generation 2 (ISR G2) Security Target, Version 1.1, March 2014
- [6] Common Criteria Evaluation and Validation Scheme - Guidance to CCEVS Approved Common Criteria Testing Laboratories, Version 2.0, 8 Sep 2008.
- [7] Evaluation Technical Report For Cisco ISR G2, parts 1 and 2 (and associated AAR and test report), version 1.0, February 2014.